

DALEN Global

Jiangsu Dalen Electronic Co.,Ltd.

NO.5 Baitan Road, New & High-tech
Industrial Development Zone, Changshu City,
Jiangsu Province, China.
Tel: +86-512-52977992
Fax: +86-512-52977991
E-mail: gabriella@dalen-tech.com
[Http://www.dalen-tech.com](http://www.dalen-tech.com)

Dalen Japan Co.,Ltd.

1-9-10 Takatsu Chuo-ku Osaka-shi Japan
[Http://www.dalen.jp](http://www.dalen.jp)

Dalen S E Asia Pte Ltd.

3 Ang Mo Kio Street 62
#01-34 Link@AMK S-569139
[Http://www.dalen-tech.sg](http://www.dalen-tech.sg)

Dalen Benelux B.V.

Schoepenweg 45 8243 PX Lelystad The Netherlands
[Http://www.dalen-tech.nl](http://www.dalen-tech.nl)

Dalen Italia S.R.L.

Via Dario Campana, 14-47922 Rimini (Rn) , Italy.
<http://www.dalen-tech.it>



DALEN

Tech For Natural Light

about DALEN

DALEN, established in 2011 as an innovative enterprise focusing on R&D, Production, Sales & Marketing of Smart Home Lighting, and has been listed on NEEQ Stock Market in 2016.

Using SAMSUNG LED chips, imported components and own-developed digital driver, DALEN realized real eye-protection technology without flickering & blue light harm, proved by many authoritative certificates including PSE, CE(TUV), TUV EN62471, ISO9001-2015, etc. We also developed own APP ecoCloud which can control our smart light and other home appliances. DALEN is dedicated to keeping great design and high quality of products, obtained a lot of international patents.


In the past 7 years, DALEN achieved very good reputation in Japan, Southeast Asia, Europe, and many other markets. We have set up 5 sales companies worldwide, located in Japan, Singapore, Italy, the Netherlands and Czech Republic. We're always making efforts to offer healthy, smart lighting to improve people's life quality.



China




Singapore

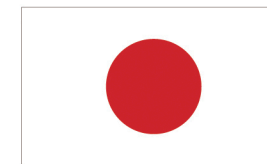

Japan



Benelux





Czech Republic



Italy

Dalen Global

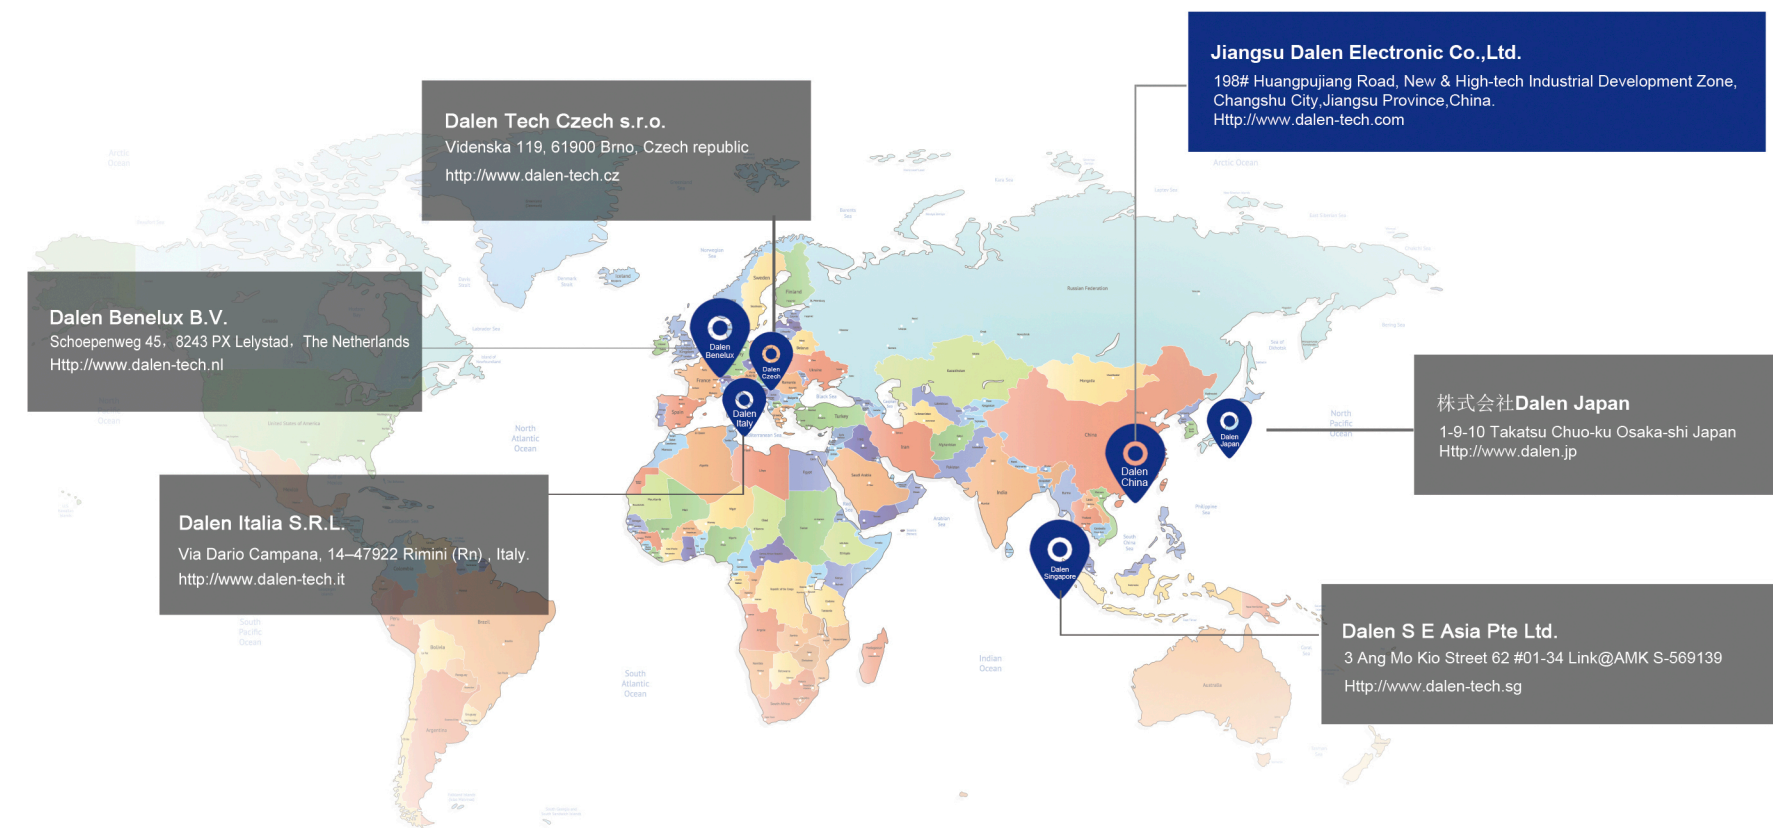

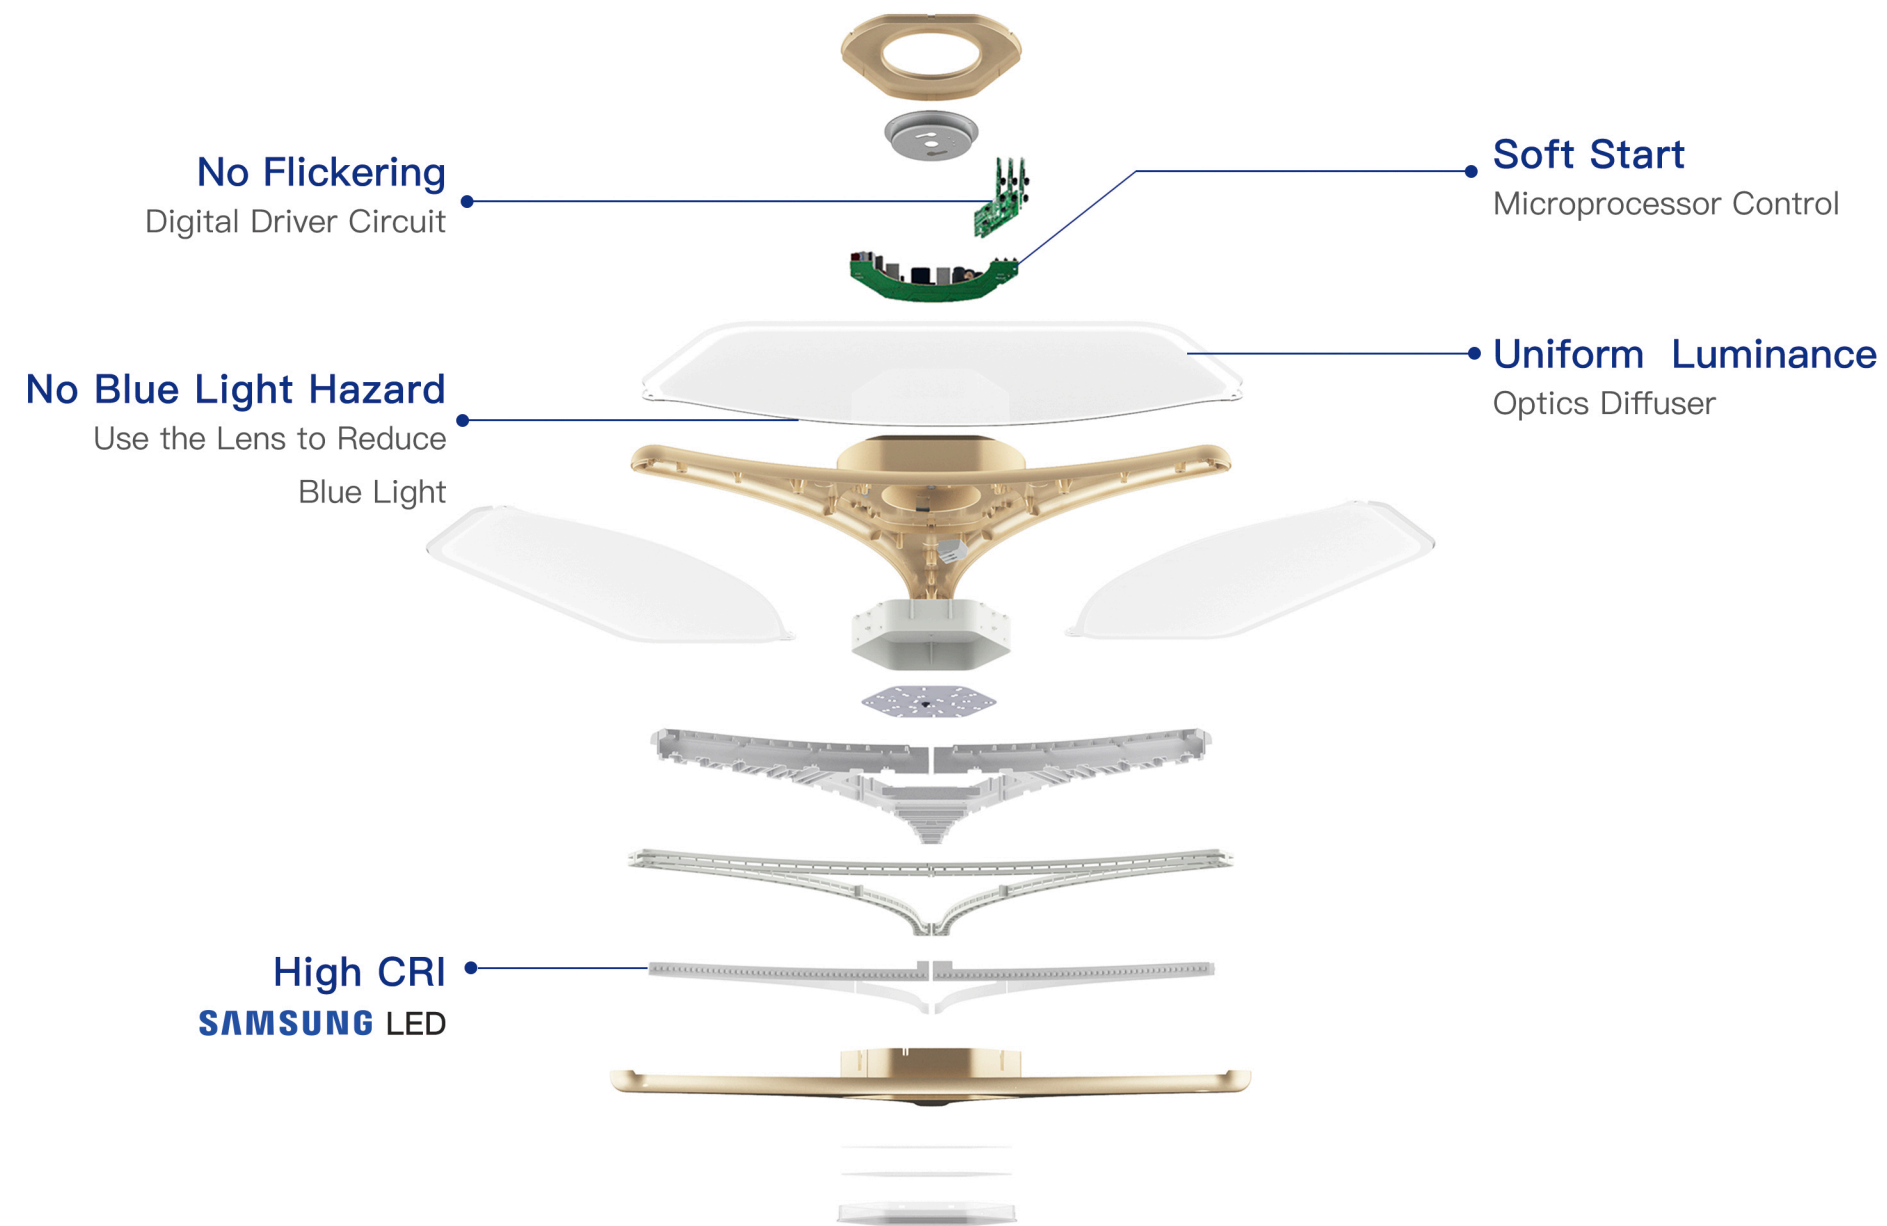



2C/2C(D)

Input Power	39W
Color Temperature	2800K~6000K, adjustable with remote control
Luminous Flux	Max 3900LM, adjustable with remote control
LED Specification	SAMSUNG2835
Color rendering	Ra>95
Lmap Size	φ560mm×80mm
Net Weight	2.0KG/2.6KG
Color	Golden/Silver





2D/2D(D)

Input Power	39W
Color Temperature	2800K~6000K, adjustable with remote control
Luminous Flux	Max 3900LM, adjustable with remote control
LED Specification	SAMSUNG2835
Color rendering	Ra>95
Lmap Size	φ560mm×80mm
Net Weight	2.3KG/2.8KG
Color	Golden/Silver




Model Number	2S Plus
Input Power	56W
Color Temperature	2800K~6000K , adjustable with remote control
Luminous Flux	Max 5600LM, adjustable with remote control
LED Specification	SAMSUNG 2835
Color Rendering	Ra>95
Lamp Size	800mm×80mm
Net weight	4.2KG
Insect resistant	IP40
Color	Golden/Silver

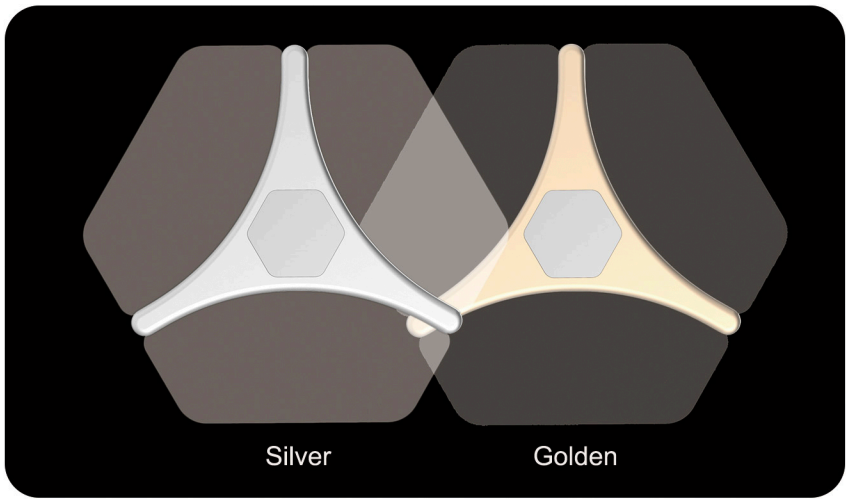

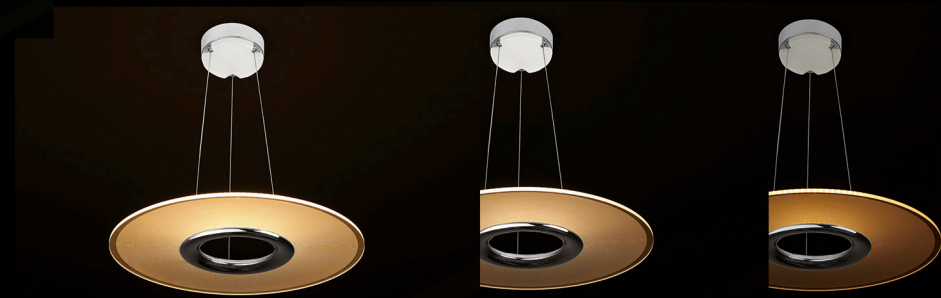

Super Slim LED Pendant Light

Model Number	DL-C108T
Input Power	28W
Color Temperature	2800K~6000K, 4 Level / electrodeless adjustments by remote control
Luminous Flux	Max 2600LM, 4 Level / electrodeless adjustments by remote control
LED Specification	SAMSUNG 2835
Color rendering	Ra>95
Lamp Size	φ500mm*50mm
Net Weight	2.24kg





DL-C212T(X)



DL-C102TX

Model Number	DL-C212T (X)
Input Power	24W , Gentle Adjustments by Remote control
Color Temperature	2800K~6000K , Gentle Adjustments by Remote control
Luminous Flux	Max 2200LM
LED Specification	SAMSUNG2835
Color Rendering	Ra>95
Lamp Size	φ450mm*91mm
Net weight	1.3KG

DL-C102TX
28W , Gentle Adjustments by Remote control
2800K~6000K , Gentle Adjustments by Remote control
Max 2600LM
SAMSUNG 2835
Ra>95
φ450mm*91mm
1.3KG



Model Number	DL-C216T
Input Power	38W
Color Temperature	2800K~6000K , Gentle Adjustments by Remote control
Luminous Flux	Max 3600LM, Gentle Adjustments by Remote control
LED Specification	SAMSUNG2835
Color Rendering	Ra>95
Lamp Size	φ490mm×93mm
Net weight	1.6KG
Insect resistant	IP40

DL-C216T (X)
38W
2800K~6000K , , Gentle Adjustments by Remote control
Max 3600LM, , Gentle Adjustments by Remote control
SAMSUNG 2835
Ra>95
φ490mm×93mm
1.6KG
IP40



Model Number	DL-C219T(X)
Input Power	24W
Color Temperature	2800K~6000K , Gentle Adjustments by Remote control
Luminous Flux	Max 2200LM , Gentle Adjustments by Remote control
LED Specification	SAMSUNG2835
Color Rendering	Ra>95
Lamp Size	φ420mm×93mm
Net weight	1.1KG
Insect resistant	IP40

DL-C319T
38W
2800K~6000K , Gentle Adjustments by Remote control
Max 3600LM , Gentle Adjustments by Remote control
SAMSUNG 2835
Ra>95
φ566mm×93mm
1.9KG
IP40

DL-C319T(X)
38W
2800K~6000K , Gentle Adjustments by Remote control
Max 3600LM , Gentle Adjustments by Remote control
SAMSUNG 2835
Ra>95
φ566mm×93mm
1.9KG
IP40

DL-C519T(X)
56W
2800K~6000K , Gentle Adjustments by Remote control
Max 5000LM , Gentle Adjustments by Remote control
SAMSUNG 2835
Ra>95
φ800mm×125mm
3.56KG
IP40





Model Number	DL-C217T
Input Power	24W
Color Temperature	2800K~6000K , Gentle Adjustments by Remote control
Luminous Flux	Max 2200LM , Gentle Adjustments by Remote control
LED Specification	SAMSUNG 2835
Color Rendering	Ra>95
Insect resistant	IP40
Lamp Size	φ500mm×91mm
Net weight	1.5KG

DL-C317T
38W
2800K~6000K , Gentle Adjustments by Remote control
Max 3600lm , Gentle Adjustments by Remote control
SAMSUNG 2835
Ra>95
IP40
φ600mm×120mm
1.9KG

DL-C517T
56W
2800K~6000K , Gentle Adjustments by Remote control
Max 5000LM , Gentle Adjustments by Remote control
SAMSUNG 2835
Ra>95
IP40
φ680mm×145mm
3.56KG



DL-C21GT(XM)



DL-C31GT(XM)



DL-C51GT(XM)

Model Number	DL-C21GT(XM)
Input Power	24W
Color Temperature	2800K~6000K, Gentle Adjustments by T-Remote control
Luminous Flux	Max 2200LM, Gentle Adjustments by T-Remote control
LED Specification	SAMSUNG 2835
Color Rendering	Ra>95
Lamp Size	φ420mm×92mm
Net weight	1.5KG
Insect resistant	IP40

DL-C31GT(XM)
38W
2800K~6000K, Gentle Adjustments by T-Remote control
Max 3600LM, Gentle Adjustments by T-Remote control
SAMSUNG 2835
Ra>95
φ566mm×93mm
1.9KG
IP40

DL-C51GT(XM)
56W
2800K~6000K, Gentle Adjustments by T-Remote control
Max 5000LM, Gentle Adjustments by T-Remote control
SAMSUNG 2835
Ra>95
φ800mm×125mm
3.6KG
IP40



DL-C215T




DL-C415T



DL-C515T


Light
mode




whole light



cool white



warm white



night light

Model Number	DL-C215T
Input Power	24W
Color Temperature	2800K~6000K , Gentle Adjustments by Remote control
Luminous Flux	Max 2200LM, Gentle Adjustments by Remote control
LED Specification	SAMSUNG2835
Color Rendering	Ra>95
Lamp Size	φ350mm×98mm
Net weight	1.5KG
Insect resistant	IP40

Model Number	DL-C415T
Input Power	38W
Color Temperature	2800K~6000K , , Gentle Adjustments by Remote control
Luminous Flux	Max 3600LM, , Gentle Adjustments by Remote control
LED Specification	SAMSUNG 2835
Color Rendering	Ra>95
Lamp Size	φ530mm×120mm
Net weight	1.9KG
Insect resistant	IP40

Model Number	DL-C515T
Input Power	56W
Color Temperature	2800K~6000K , Gentle Adjustments by Remote control
Luminous Flux	Max 5000LM, Gentle Adjustments by Remote control
LED Specification	SAMSUNG 2835
Color Rendering	Ra>95
Lamp Size	φ600mm×125mm
Net weight	3.1KG
Insect resistant	IP40



DL-C215T(X)

DL-C515T (X)

DL-C415T(X)

Model Number	DL-C215T(X)
Input Power	24W
Color Temperature	2800K~6000K , Gentle Adjustments by Remote control
Luminous Flux	Max 2200LM , Gentle Adjustments by Remote control
LED Specifcation	SAMSUNG2835
Color Rendering	Ra>95
Lamp Size	φ350mmx98mm
Net weight	1.1KG
Insect resistant	IP40

DL-C415T (X)
38W
2800K~6000K , Gentle Adjustments by Remote control
Max 3600LM , Gentle Adjustments by Remote control
SAMSUNG 2835
Ra>95
φ530mmx120mm
1.6KG
IP40

DL-C515T (X)
56W
2800K~6000K , Gentle Adjustments by Remote control
Max 5000LM , Gentle Adjustments by Remote control
SAMSUNG 2835
Ra>95
φ600mmx150mm
2.8KG
IP40





Model Number	DL-C217T(X)
Input Power	24W
Color Temperature	2800K~6000K, Gentle Adjustments by Remote control
Luminous Flux	Max 2200LM, Gentle Adjustments by Remote control
LED Specification	SAMSUNG 2835
Color Rendering	Ra>95
Insect resistant	IP40
Lamp Size	φ500mm×91mm
Net weight	1.5KG

DL-C317T(X)
38W
2800K~6000K, Gentle Adjustments by Remote control
Max 3600lm, Gentle Adjustments by Remote control
SAMSUNG 2835
Ra>95
IP40
φ600mm×120mm
1.9KG

DL-C517T (X)
56W
2800K~6000K , Gentle Adjustments by Remote control
Max 5000LM, Gentle Adjustments by Remote control
SAMSUNG 2835
Ra>95
IP40
φ680mm×145mm
3.56KG



DL-C103(X)

Input Power	24W
Color Temperature	Cool White – Neutral White – Warm White by wall switch
Luminous Flux	Max 2200LM, 3 Level CCT
LED Specification	SAMSUNG2835
Color rendering	Ra>95
Lamp Size	φ446mm×91mm
Net weight	1.1KG



DL-C213T(X)

Input Power	24W
Color Temperature	2800K~6000K
Luminous Flux	Max 2200LM
LED Specification	SAMSUNG2835
Color rendering	Ra>95
Lamp Size	φ430mm×91mm
Net weight	1.3KG



DL-S28TX

Input Power	28W
Color Temperature	2800K~6000K
Luminous Flux	Max 2600LM
LED Specification	SAMSUNG2835
Color rendering	Ra>95
Lamp Size	φ430mm×91mm
Net weight	1.3KG



DL-S28T

Input Power	28W
Color Temperature	2800K~6000K
Luminous Flux	Max 2600LM
LED Specification	SAMSUNG2835
Color rendering	Ra>95
Lamp Size	φ430mm×91mm
Net weight	1.3KG



DL-C213T

Input Power	24W
Color Temperature	2800K~6000K
Luminous Flux	Max 2200LM
LED Specification	SAMSUNG2835
Color rendering	Ra>95
Lamp Size	φ430mm×91mm
Net weight	1.3KG